




## Crimped Wire Wheel Brushes

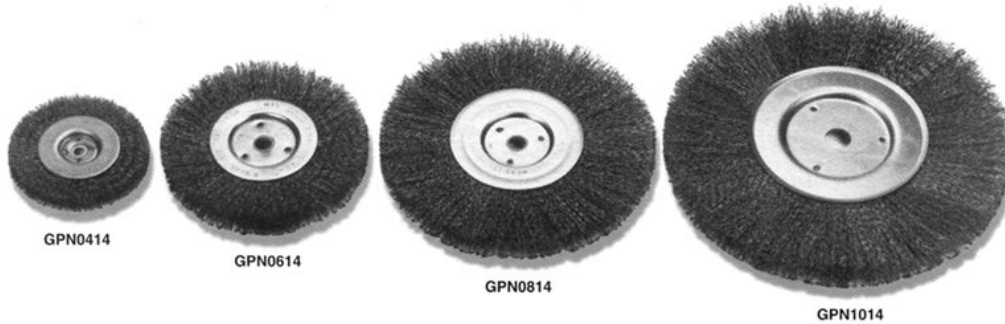

### GENERAL PURPOSE - NARROW FACE

| PRODUCT NUMBER | BRUSH DIAMETER | WIRE DIAMETER | STANDARD ARBOR HOLE | TRIM LENGTH | FACE WIDTH | THICKNESS AT FACE PLATES (± 1/32") | MAXIMUM SAFE FREE SPEED (RPM) |
|----------------|----------------|---------------|---------------------|-------------|------------|------------------------------------|-------------------------------|
| GPN0406        | 4"             | .006          | 3/8-1/2*            | 13/16"      | 1/2"       | 13/32"                             | 6,000                         |
| GPN0406-S      | 4"             | .006-S        | 3/8-1/2*            | 13/16"      | 1/2"       | 13/32"                             | 6,000                         |
| GPN0408        | 4"             | .008          | 3/8-1/2"            | 13/16"      | 1/2"       | 13/32"                             | 6,000                         |
| GPN0410        | 4"             | .0095         | 3/8-1/2*            | 13/16"      | 1/2"       | 13/32"                             | 6,000                         |
| GPN0411        | 4"             | .0118         | 3/8-1/2*            | 13/16"      | 1/2"       | 13/32"                             | 6,000                         |
| GPN0411-S      | 4"             | .0118-S       | 3/8-1/2"            | 13/16"      | 1/2"       | 13/32"                             | 6,000                         |
| GPN0414        | 4"             | .014          | 3/8-1/2*            | 13/16"      | 1/2"       | 13/32"                             | 6,000                         |
| GPN0606        | 6"             | .006          | 1/2-5/8*            | 1-7/16"     | 1/2"       | 7/16"                              | 6,000                         |
| GPN0606-S      | 6"             | .006-S        | 1/2-5/8*            | 1-7/16"     | 1/2"       | 7/16"                              | 6,000                         |
| GPN0608        | 6"             | .008          | 1/2-5/8*            | 1-7/16"     | 1/2"       | 7/16"                              | 6,000                         |
| GPN0610        | 6"             | .0104         | 1/2-5/8*            | 1-7/16"     | 1/2"       | 7/16"                              | 6,000                         |
| GPN0611        | 6"             | .0118         | 1/2-5/8*            | 1-7/16"     | 1/2"       | 7/16"                              | 6,000                         |
| GPN0611-S      | 6"             | .0118-S       | 1/2-5/8*            | 1-7/16"     | 1/2"       | 7/16"                              | 6,000                         |
| GPN0614        | 6"             | .014          | 1/2-5/8*            | 1-7/16"     | 1/2"       | 7/16"                              | 6,000                         |
| GPN0806        | 8"             | .006          | 1/2-5/8*            | 2-1/16"     | 1/2"       | 1/2"                               | 6,000                         |
| GPN0806-S      | 8"             | .006-S        | 1/2-5/8*            | 2-1/16"     | 1/2"       | 1/2"                               | 6,000                         |
| GPN0808        | 8"             | .008          | 1/2-5/8*            | 2-1/16"     | 1/2"       | 1/2"                               | 6,000                         |
| GPN0810        | 8"             | .0104         | 1/2-5/8*            | 2-1/16"     | 1/2"       | 1/2"                               | 6,000                         |
| GPN0811        | 8"             | .0118         | 1/2-5/8*            | 2-1/16"     | 1/2"       | 1/2"                               | 6,000                         |
| GPN0811-S      | 8"             | .0118-S       | 1/2-5/8*            | 2-1/16"     | 1/2"       | 1/2"                               | 6,000                         |
| GPN0814        | 8"             | .014          | 1/2-5/8*            | 2-1/16"     | 1/2"       | 1/2"                               | 6,000                         |
| GPN1006        | 10"            | .006          | 3/4"                | 2-3/8"      | 3/4"       | 19/32"                             | 6,000                         |
| GPN1011        | 10"            | .0118         | 3/4"                | 2-3/8"      | 3/4"       | 19/32"                             | 6,000                         |
| GPN1014        | 10"            | .014          | 3/4"                | 2-3/8"      | 3/4"       | 19/32"                             | 6,000                         |
| GPN1206        | 12"            | .006          | 1-1/4"              | 2-3/8"      | 3/4"       | 1/2"                               | 6,000                         |
| GPN1210        | 12"            | .0104         | 1-1/4"              | 2-3/8"      | 3/4"       | 1/2"                               | 6,000                         |
| GPN1211        | 12"            | .0118         | 1-1/4"              | 2-3/8"      | 3/4"       | 1/2"                               | 6,000                         |
| GPN1214        | 12"            | .014          | 1-1/4"              | 2-3/8"      | 3/4"       | 1/2"                               | 6,000                         |
| GPN1511        | 15"            | .0118         | 1-1/4"              | 4-7/16"     | 3/4"       | 1/2"                               | 6,000                         |

S - Denotes Stainless Steel

\*Features Plastic Snap-Out Arbor Hole Adapter

Other Arbor Hole Sizes Available Upon Request

APPLICATIONS:

FEATURES:

- [Artist Brushes pg 1 pg 2](#)
- [Chip Brushes](#)
- [Cup Brushes](#)
- [Flue, Boiler & Pipe Brushes](#)
- [Kalsomine Brushes](#)
- [Maintenance Brushes](#)
  - [Floor - Fine](#)
  - [Floor - Medium](#)
  - [Floor - Coarse](#)
  - [Heavy Duty](#)
  - [Handles](#)
  - [Broom](#)
  - [Dusters](#)
  - [Window](#)
  - [Sanitary](#)
  - [Deck & Whisk](#)
  - [Wire](#)
  - [Hand Wire](#)
  - [Platers](#)
  - [Tube & Spiral](#)
- [Mops](#)
- [Paint Brushes](#)
- [Paint Roller Applicators](#)
- [Power Tube Brushes](#)
- [Sash Tool Brushes](#)
- [Squeegees](#)
- [Varnish Brushes](#)
- [Wire End Brushes](#)
- [Wire Wheel Brushes](#)
  - [Crimped-Narrow](#)
  - [Crimped-Medium](#)
  - [Crimped-Heavy Duty](#)
  - [Knot Type](#)
  - [Copper Center](#)
  - [Whitewash Brushes](#)

### Catalog Pages

Metal Wire Type

- [A1](#)
- [A2](#)
- [A3](#)
- [A4](#)
- [A5](#)
- [A6](#)
- [A7](#)
- [A8](#)

Maintenance Type

- [B1](#)
- [B2](#)
- [B3](#)
- [B4](#)
- [B5](#)
- [B6](#)
- [B7](#)
- [B8](#)
- [B9](#)
- [B10](#)
- [B11](#)
- [B12](#)

Paint, Varnish, Artist Type

- [C1](#)
- [C2](#)
- [C3](#)
- [C4](#)
- [C5](#)
- [C6](#)
- [C7](#)
- [C8](#)
- [Index](#)

- Light Deburring
- Edge Blending
- Roughening for Adhesion
- Cleaning
- Surface Finishing and Polishing
- Removal of Rust, Scale and Dirt
- Flash Removal
- Finish Preparation Prior to Painting or Plating
- Tool Mark Removal
- Narrow Brushing Face - Allows Wire Tips Access to Areas Inaccessible to Wide Brushes
- Flexible Brushing Action - Long Trim Allows Brush to Conform to Uneven Surfaces
- Can be Used Singly or Stacked in Multiples to Make a Wide Face Brushing Tool
- Precision Balanced for Safe, Efficient Operation at Indicated R.P.M.

**Safety Requirements:** Operators must, at all times, observe common safety practices, such as wearing goggles, keeping machine guards in place, observing all speed restrictions, wearing appropriate protective clothing and comply with ANS-B165.1 - 1979 "Safety Requirements For The Design, Care And Use Of Power Driven Brushing Tools."

---

**[Home](#)   [Index](#)   [Order](#)   [Policy](#)   [Contact](#)**

**The Trent Mfg. Co. - 6212 Carnegie Avenue - Cleveland, Ohio 44103-4696 - (216) 391-1551  
E-mail: [trentmfg@aol.com](mailto:trentmfg@aol.com) - FAX: (216) 391-1550 - Toll Free: 800-458-7368**