



Features

- Durable high-gloss finish.
- 17-1/4" (438 mm) bath depth (floor to top of threshold).
- 60" (1524 mm) x 29" (737 mm) x 17-1/4" (438 mm) complete unit finished dimensions.

Material


- Compression molded from our exclusive solid Vikrell® material.

Installation

- Above-floor drain (AFD) rough-in.

Recommended Products/Accessories

K-23726 Drain treatment
K-23733 Vikrell® cleaner

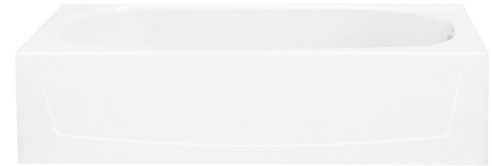

ADA

Codes/Standards



CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
ADA
ICC/ANSI A117.1
HUD, UM Bulletin 73


Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|----------------|
|  | 0 | White |
|  | 96 | KOHLER Biscuit |

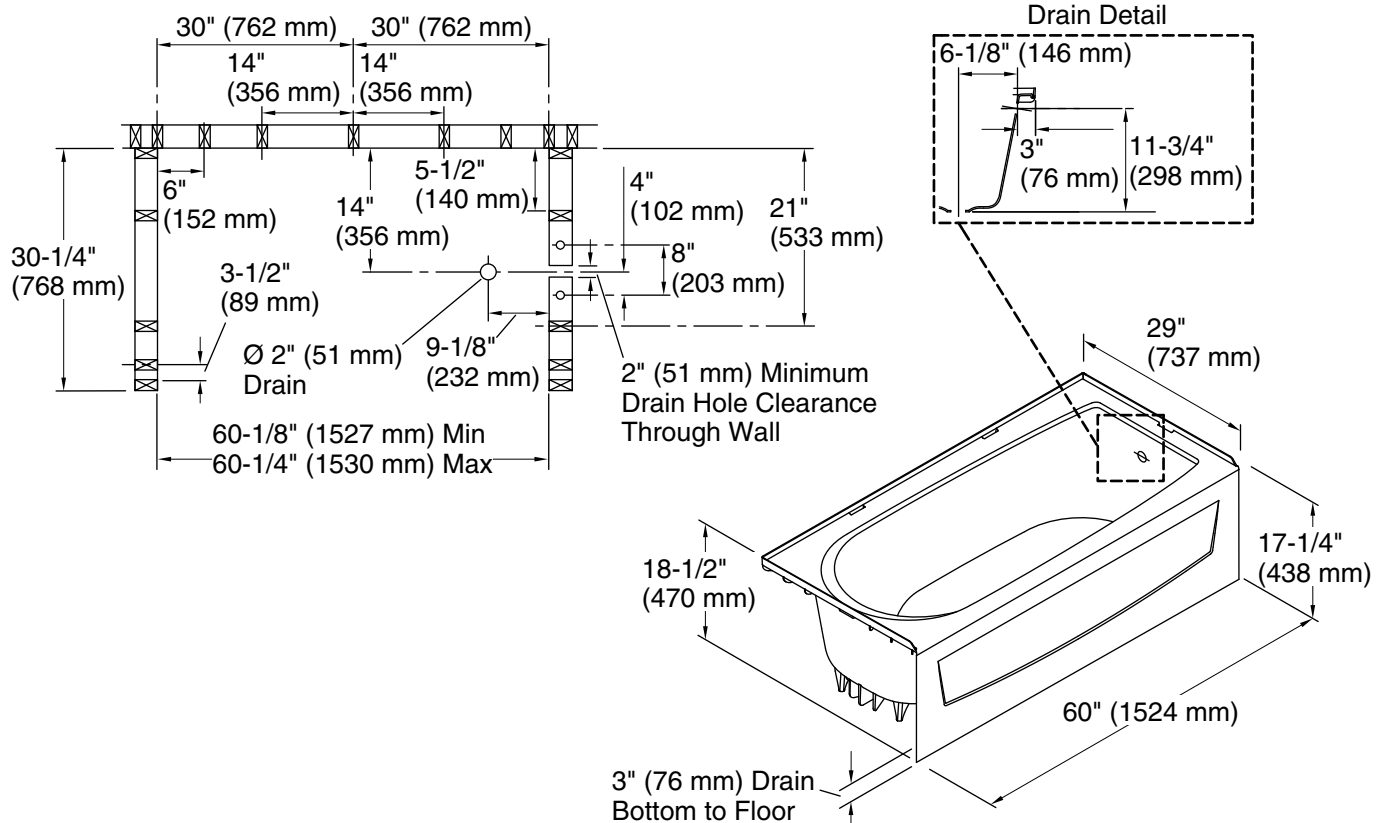

Technical Information

All product dimensions are nominal.

| | |
|------------------------|------------------------------|
| Installation: | Three-wall alcove |
| Drain location: | Right |
| Basin area, bottom: | 21" x 39" (533 mm x 991 mm) |
| Basin area, top: | 24" x 53" (610 mm x 1346 mm) |
| Water depth: | 10-1/4" (260 mm) |
| Water capacity: | 35 gal (132.5 L) |
| Minimum flat for door: | 1-3/4" (44 mm) |
| Maximum door width: | 56-3/4" (1441 mm) |

Notes

- Install this product according to the installation instructions.
- Studs should be positioned roughly as shown. Double studding is recommended for pivot shower door installations.
- ADA compliant when installed to the specific requirements of these regulations.