




Z1088 BACKWATER VALVE GATE TYPE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

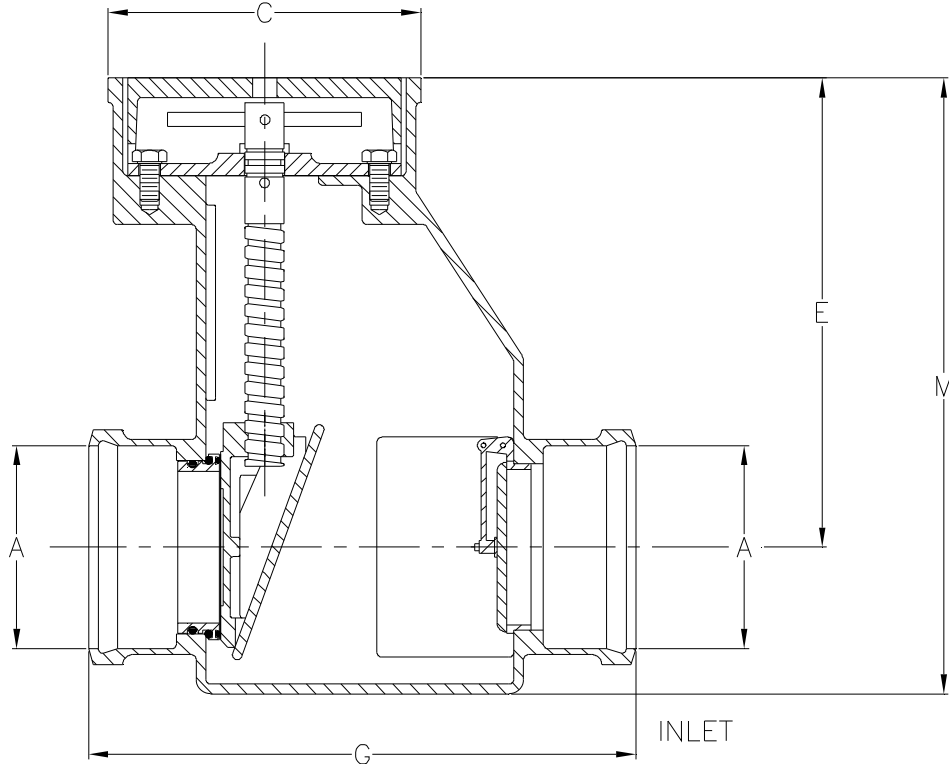

Dimensions In Inches				Approx. Wt. Lbs. [kg]
A Pipe Size	C	E	M	
4 [102]	8 [203]	12 [305]	15-3/4 [400]	80 [36]
6 [152]	10-1/2 [267]	14-1/2 [368]	19 [483]	120 [54]

ENGINEERING SPECIFICATION: ZURN Z1088
Gate Type Backwater Valve, Dura-Coated cast iron body with automatic PVC (4 [102] size only) flapper type backwater valve with O-ring adjacent to inlet and spade type bronze gate valve with O-ring seat insert adjacent to outlet easily controlled at floor level by covered handle engaging bronze non-rising stem. **Note:** Not designed nor intended to be used as a shut-off valve.

CONNECTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type)	CONNECTION	G-LENGTH
4 [102]	_____	HB X HB Hub x Hub	14 [356]
6 [152]	_____	HB X HB Hub x Hub	16 [406]
4 [102]	_____	HB X NH Hub x No-Hub	18 [457]
6 [152]	_____	HB X NH Hub x No-Hub	20 [508]
4 [102]	_____	NH X NH No-Hub x No-Hub	18 [457]
6 [152]	_____	NH X NH No-Hub x No-Hub	16 [406]

PREFIXES

_____ Z D.C.C.I. Body and Cover with PVC Flapper Valve, Bronze Check Valve, Gate, and Stem*

SUFFIXES

- _____ -BV Bronze Flapper Valve (4 [102] Size)
- _____ -G Galvanized Cast Iron
- _____ -WH Wheel Handle
- _____ -12 12 [305] Extension
- _____ -24 24 [610] Extension

REV. G	DATE: 8/25/11	C.N. NO. 121989
DWG. NO. 58899		PRODUCT NO. Z1088

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED